



Slide Cold

Non-insulated system for
light sliding elements



aliplast[®]
ALUMINIUM SYSTEMS




Slide Cold

APPLICATIONS

Non-insulated sliding windows separating the terrace.
Different variations possible: 2-, 3-, 4-, and 6-part

TECHNICAL FEATURES

- Min. visible width:
frame: 54mm / sash: 69mm
- Installation depth
frame: Monorail: 47.5mm
Duorail: 51mm
3-rail: 99mm
- sash: 32mm
- Glass thickness: 6-9mm & 20-24mm
- Maximum sash weight: 160kg

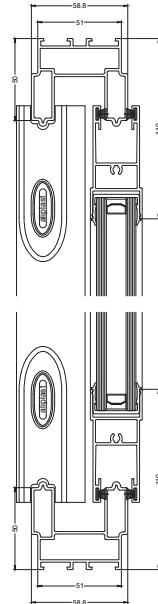

100% MADE IN BELGIUM



Aliplast develops aluminium profiles tailored to current housing needs. Everything happens under one roof, from drawing to extrusion, powder coating, insulation and transport to the Aliplast distributors. The distributors produce and install the finished windows in your building project.

25-YEAR COLOUR GUARANTEE



Aliplast gives a 25-year guarantee on 50 current colours. The Qualicoat Seaside quality label ensures that your paint colour is extra protected against aggressive environments (exhaust fumes, salty sea air, etc.). You enjoy a 15-year guarantee on all other colours. Peace of mind for the future.

DURABLE PRODUCT



Aluminium is a sustainable product because, in addition to its long lifespan, it is infinitely recyclable without compromising quality. We use a mix of primary billets with the lowest possible carbon footprint and recycled aluminium billets for our systems. The energy required to recycle profiles (melting process) is only 5% of the initial energy needed to produce primary billets.